


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 0.1 μ F 16V(0402B104K160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.50 $\pm$ 0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @16V, 120sec)

Item	Spec
Cap [μ F]	0.1($\pm$ 10%)
DF	$\leq$ 5%
IR [G-ohm]	$\geq$ 5


3. Impedance/ESR-Frequency

(Equipment: 4990A)

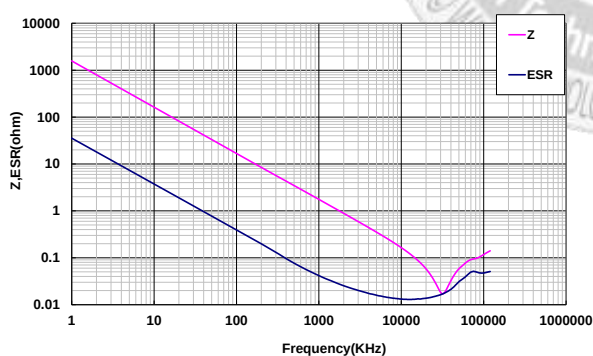

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

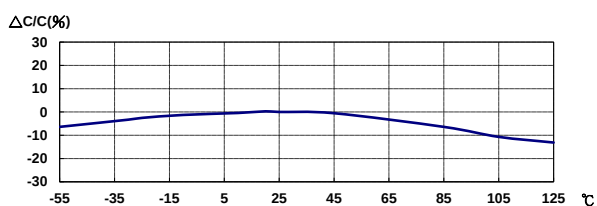

5. Temperature Rise – Ripple Current


(Equipment: 11810)

Over the measure limit.

6. Capacitance – DC Voltage Characteristics

(Equipment: 4980A; DC charge 60 $\pm$ 5sec)

8V : -14.29% ; 16V : -45.89%

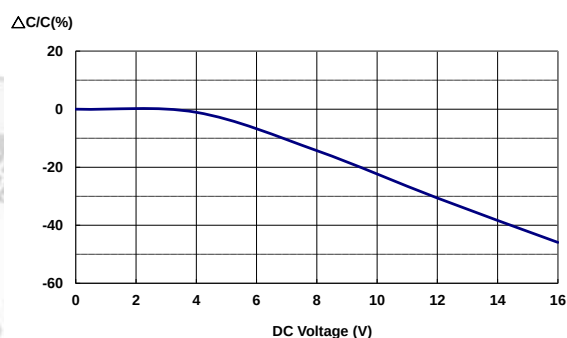

7. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

