


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

1206 X7R 4.7uF 25V(1206B475K250CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
1206 (3216)	3.20+0.30/-0.10	1.60+0.30/-0.10	1.60+0.30/-0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @25V, 120sec)

Item	Spec
Cap [uF]	4.7 (±10%)
DF	≤ 10%
IR [G-ohm]	≥ 0.106


3. Impedance/ESR-Frequency

(Equipment: 4990A)

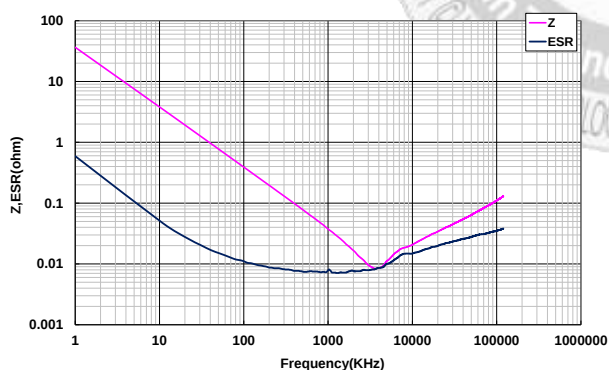


4. Capacitance – Temperature Characteristics

(Equipment: 4980A)

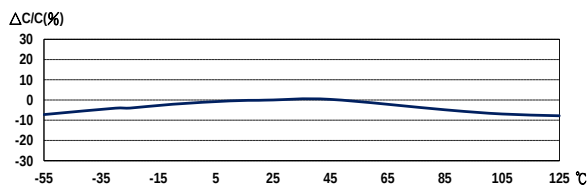

5. Temperature Rise – Ripple Current


(Equipment: 11810)

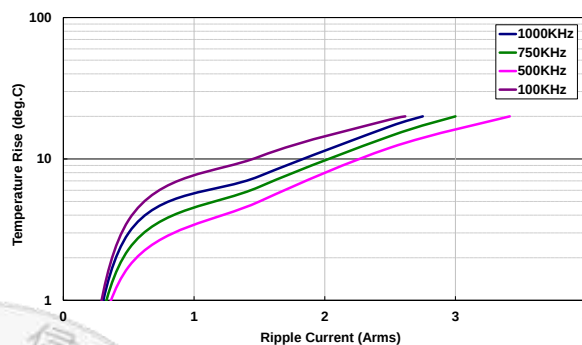

6. Capacitance – DC Voltage Characteristics


(Equipment: E4980A; DC charge 60±5sec)

12.5V : -20.57% ; 25V : -61.01%

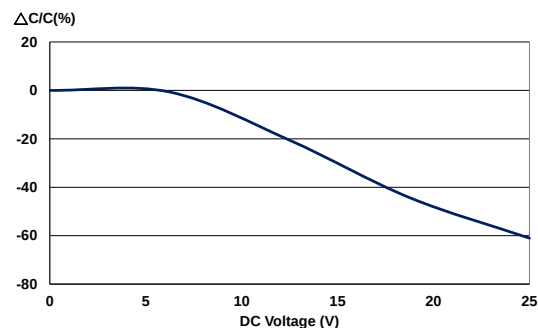

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

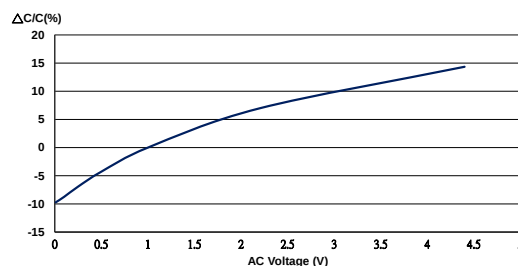

Last updated : 2023/08/09